

# Bioethanol Production from Municipal Solid Waste

Department of Civil and Environmental Engineering

Aiduan Li

Dr Majeda Khraisheh

Dr Blanca Antizar

Department of Chemical Engineering

Professor Steffan Simons

# Contents

- Background
- Previous studies
- Ongoing project
- Waste characterization
- Experiments & results
- Conclusions
- Future work

# Background: MSW - rubbish or resources?

| Composition of MSW                               | Average % Wt in MSW <sup>1</sup> | Biodegradability Fraction (%) <sup>1</sup> | Overall Biodegradability (%) <sup>1</sup> |
|--|----------------------------------|--|---|
| Paper and card                                   | 27.8                             | 100  | 27.8                                      |
| Organics   | 34.3                             | 100  | 34.3                                      |
| Fines (< 10 mm)                                  | 1.3                              | 60   | 0.8                                       |
| Textiles   | 4.4                              | 50   | 2.2                                       |
| Miscellaneous combustible                        | 10.5                             | 50   | 5.2                                       |
| Glass  | 7.5                              | 0.0  | 0.0                                       |
| Other non-combustibles                           | 1.6                              | 0.0  | 0.0                                       |
| Plastic film                                     | 5.0                              | 0.0  | 0.0                                       |
| Ferrous metal                                    | 3.0                              | 0.0  | 0.0                                       |
| Non ferrous metal                                | 0.9                              | 0.0  | 0.0                                       |
| Waste electrical and electronic equipment (WEEE) | 0.3                              | 0.0  | 0.0                                       |
| Household hazardous waste (HHW)                  | 0.2                              | 0.0  | 0.0                                       |
| Dense plastic                                    | 5.5                              | 0.0  | 0.0                                       |
| <b>Total</b>                                     | <b>100.0</b>                     | <b>-</b>                                   | <b>69.3%</b>                              |


**4.4 Million tonnes MSW produced in London in 2003**

**3% rising every year**

- **Source:** Burnley S J, Coleman T and Gronow J R (1999) "The Impact of the Landfill Directive on Strategic Waste Management in the UK", Sardinia 1999 International Conference on Landfill.
- <sup>1</sup> Dry matter basis

# Background: MSW as Feedstock?

## MSW disposal methods in London in 2003:

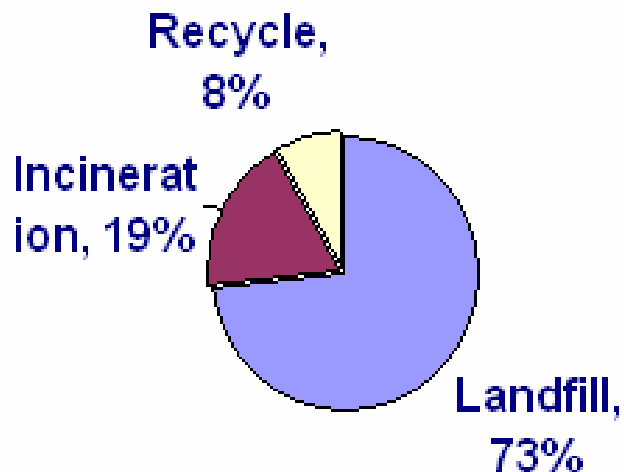


Source: Defra, UK

## Reasons for MSW as biomass feedstock:


- Potential large biodegradable fraction: around 70% of total
- E.U. Directive 2003/30/EC requires to reduce biodegradable fraction to landfill by 25% by 2010, 50% by 2013, 65% by 2020
- Large quantity, low cost
- Economic benefits of “Rubbish to fuel (bioethanol)”

# Background: Ethanol Market

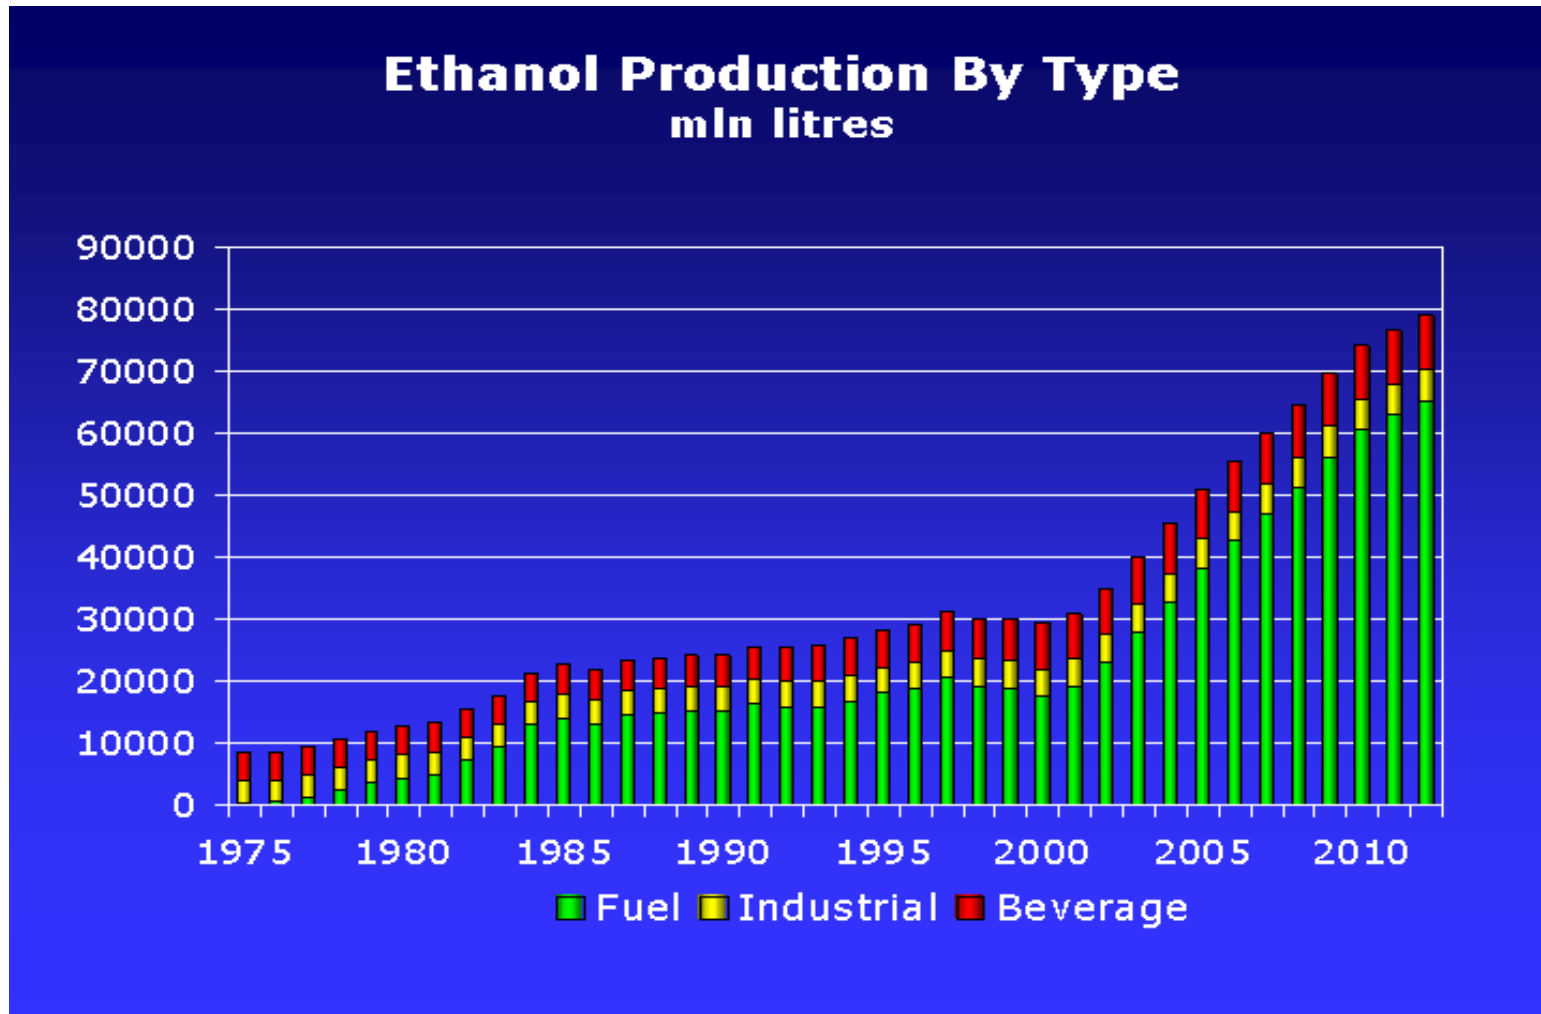

- **Source:** Berg, C. (2004). World fuel ethanol analysis and outlook. F.O. Licht, Commodity Analysts. [URL: <http://www.distill.com/>]

# Background: Ethanol process challenges

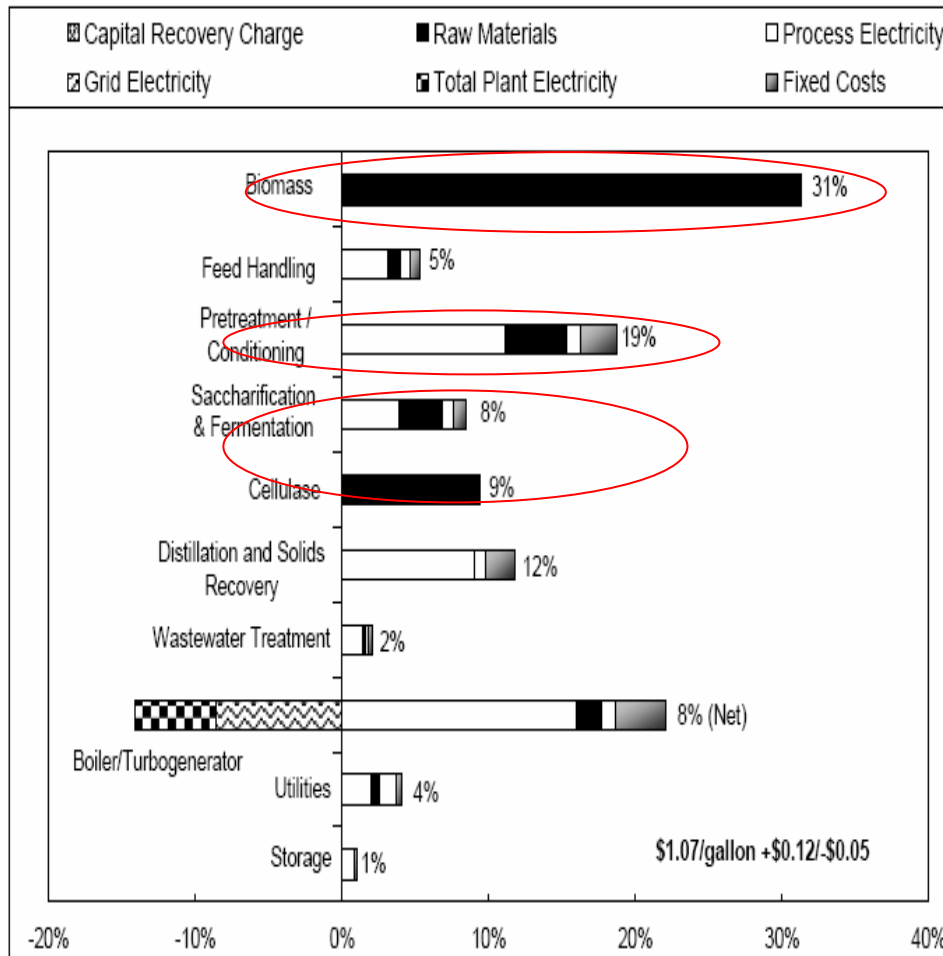

**Cost Contribution Details from Each Process Area (% of Ethanol Selling Price)**

**Source:** Wyman, C. E. (1999). Biomass ethanol: Technical progress, Opportunities, and Commercial Challenges. *Annu. Rev. Energy. Environ.* Vol 24. pp. 189-226.

## Improving technology to reduce cost:

- Producing ethanol from abundant and cheap waste biomass
- Improved efficient pretreatment
- Increasing use of genetically-engineered organisms with improved properties for hydrolysis and fermentation
- Integrating process steps to reduce capital and operating cost

# Previous Studies

- **Single Substrate**

Study on **used newspapers**, pretreated with aqueous ammonia-hydrogen peroxide solution<sup>1</sup>, stated that more than 80% enzymatic digestibility can be obtained after 72 hours hydrolysis.

Most of the previous investigations have focused on **single substrates**, using **grass, corn stover** etc

- **Multi-substrates**


Investigation Of mixed waste, by combining **construction lumber waste, almond tree prunings, wheat straw, office waste paper, and newsprint**, with pretreatment method of dilute-acid hydrolysis<sup>2</sup>, reported that 80-90% theoretic of glucose yield can be obtained with enzyme loading of 66 FPU after 100 hours hydrolysis.

**Sources:**

<sup>1</sup>Kim, S. B. & Moon, N.K. (2003). Enzymatic digestibility of used newspaper treated with aqueous ammonia-hydrogen peroxide solution. Applied Biochemistry and Biotechnology. Vol. 105-108. pp. 365-373.

<sup>2</sup> Nguyen, Q. A., Keller, F.A., Tucker, M.P., Lombard, C.K., Jenkins, B. M, Yomogida, D. E., and Tiangco, V.M. (1999). Bioconversion of mixed solids waste to ethanol. Applied Biochemistry and Biotechnology. Vol. 77-79. pp. 455-472.

# On-going Project

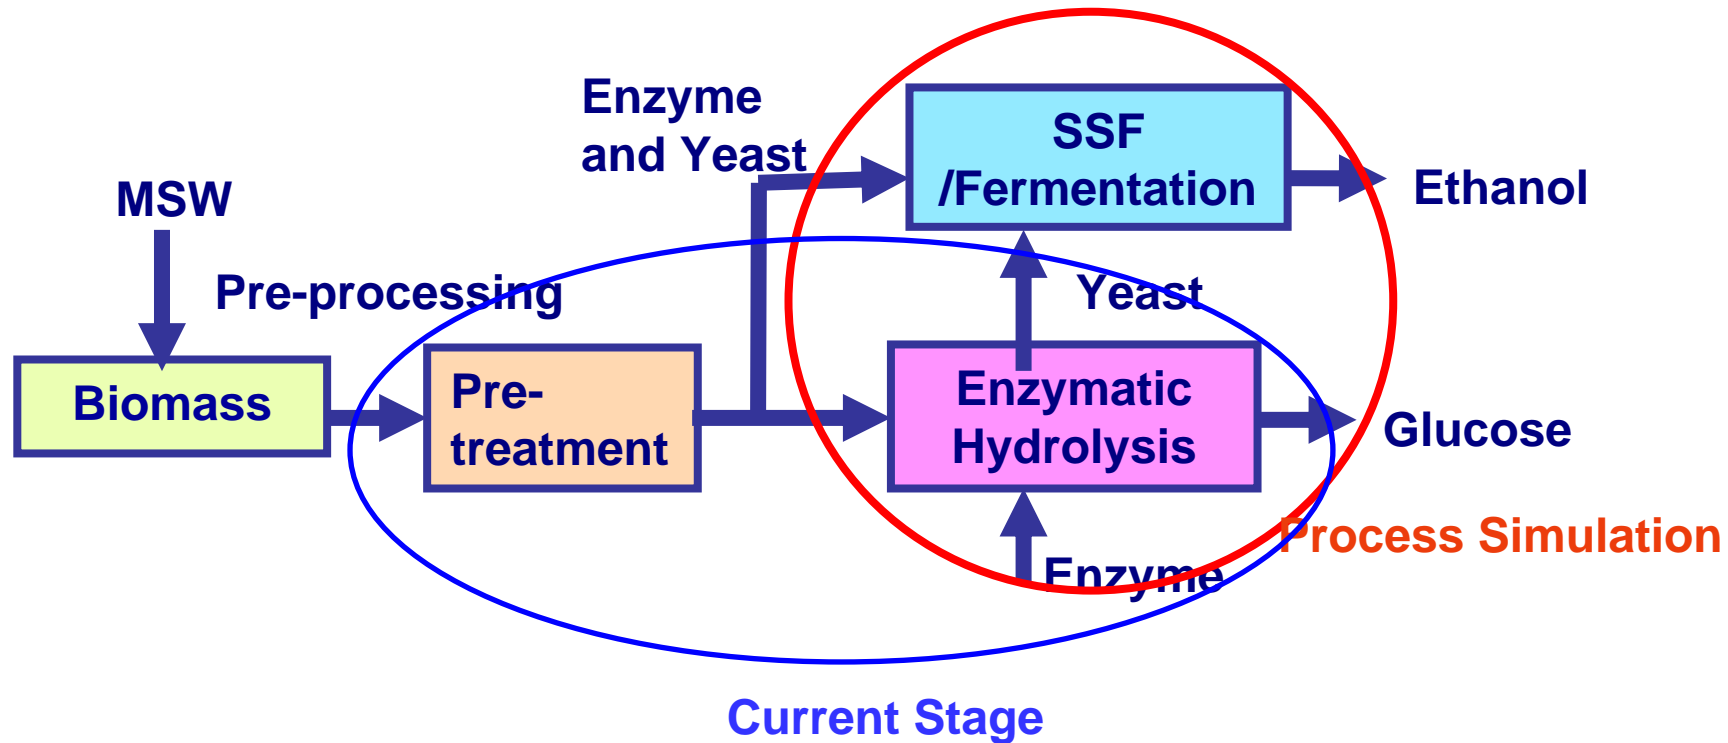


- MSW: Municipal Solid Waste
- MSW samples: Carrot peelings, potato peelings, grass, newspaper and scrap paper
- SSF: Simultaneous Saccharification and Fermentation



## Ongoing project aims


- Waste characterization
- Studying the possibility of MSW as biomass feedstock
- Investigation of effective pre-treatment methods
- Factorial experimental design with Design Expert software package
- Optimizing enzymatic hydrolysis process

# Waste Characterization: cellulose content

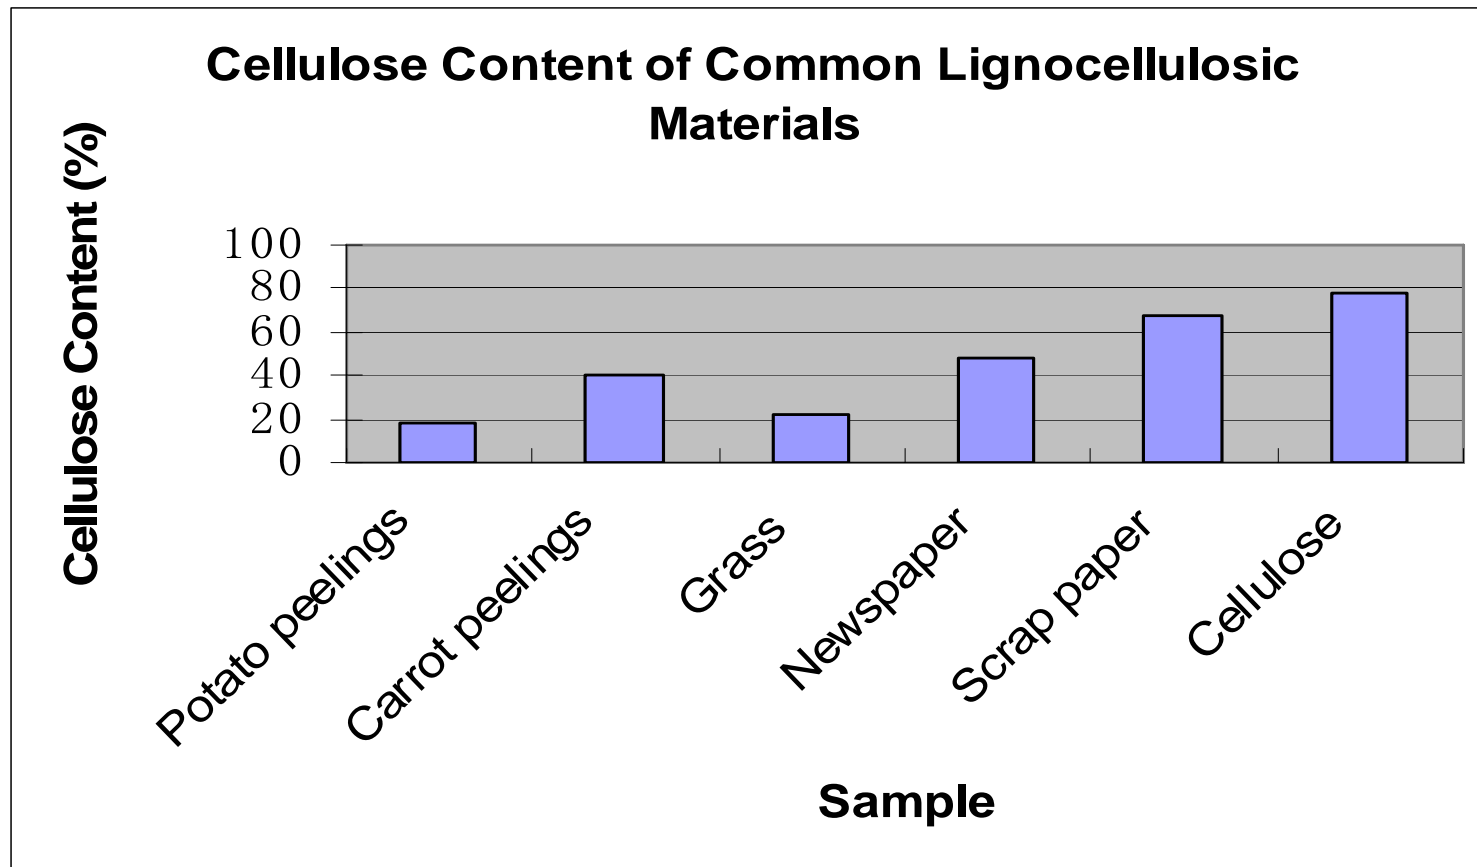

**Note:** dry matter basis

# Waste Characterization: CHN Analysis

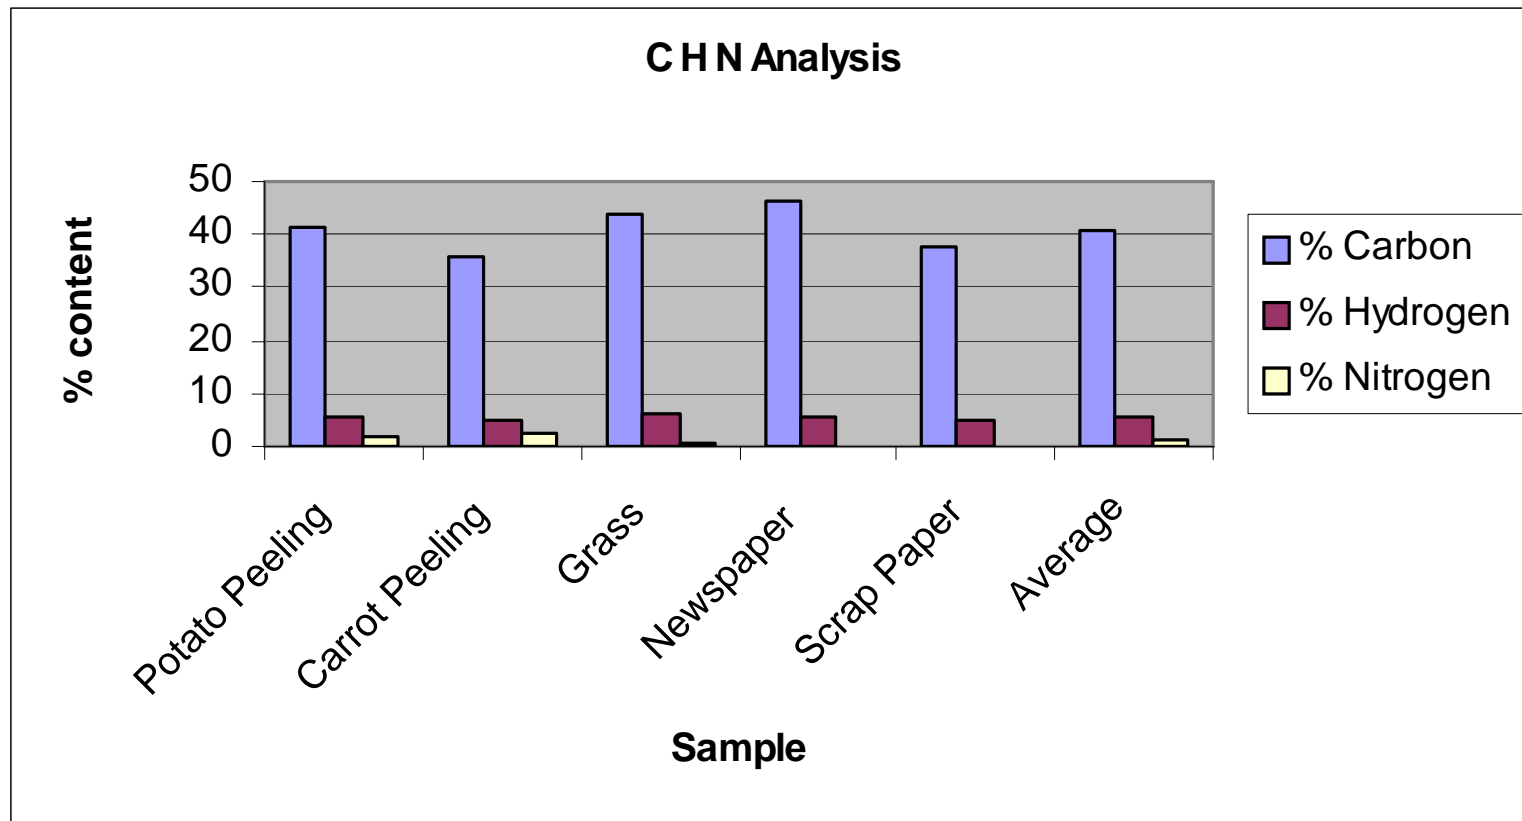


**Note:** dry matter basis

# Waste characterization: Ethanol potential

- According to our preliminary studies, 1kg of selected wastes contains 0.41 kg carbon (average carbon content is 41.05%)
  - Percentage of carbon in glucose molecule ( $C_6H_{12}O_6$ ): 40.00%
  - If 100% of the carbon present in selected wastes was converted to glucose, then the possible potential yield of glucose from **1 kg** of selected waste can be calculated.
  - Then, possible mass of glucose : 1.03 kg
  - Percentage of carbon in ethanol molecule( $C_2H_6O$ ) : 52.17%


Therefore, the possible mass of ethanol that we could obtain from 1 kg of selected waste is **0.79 kg**

# Current results: Pretreatment effects (24 hours)

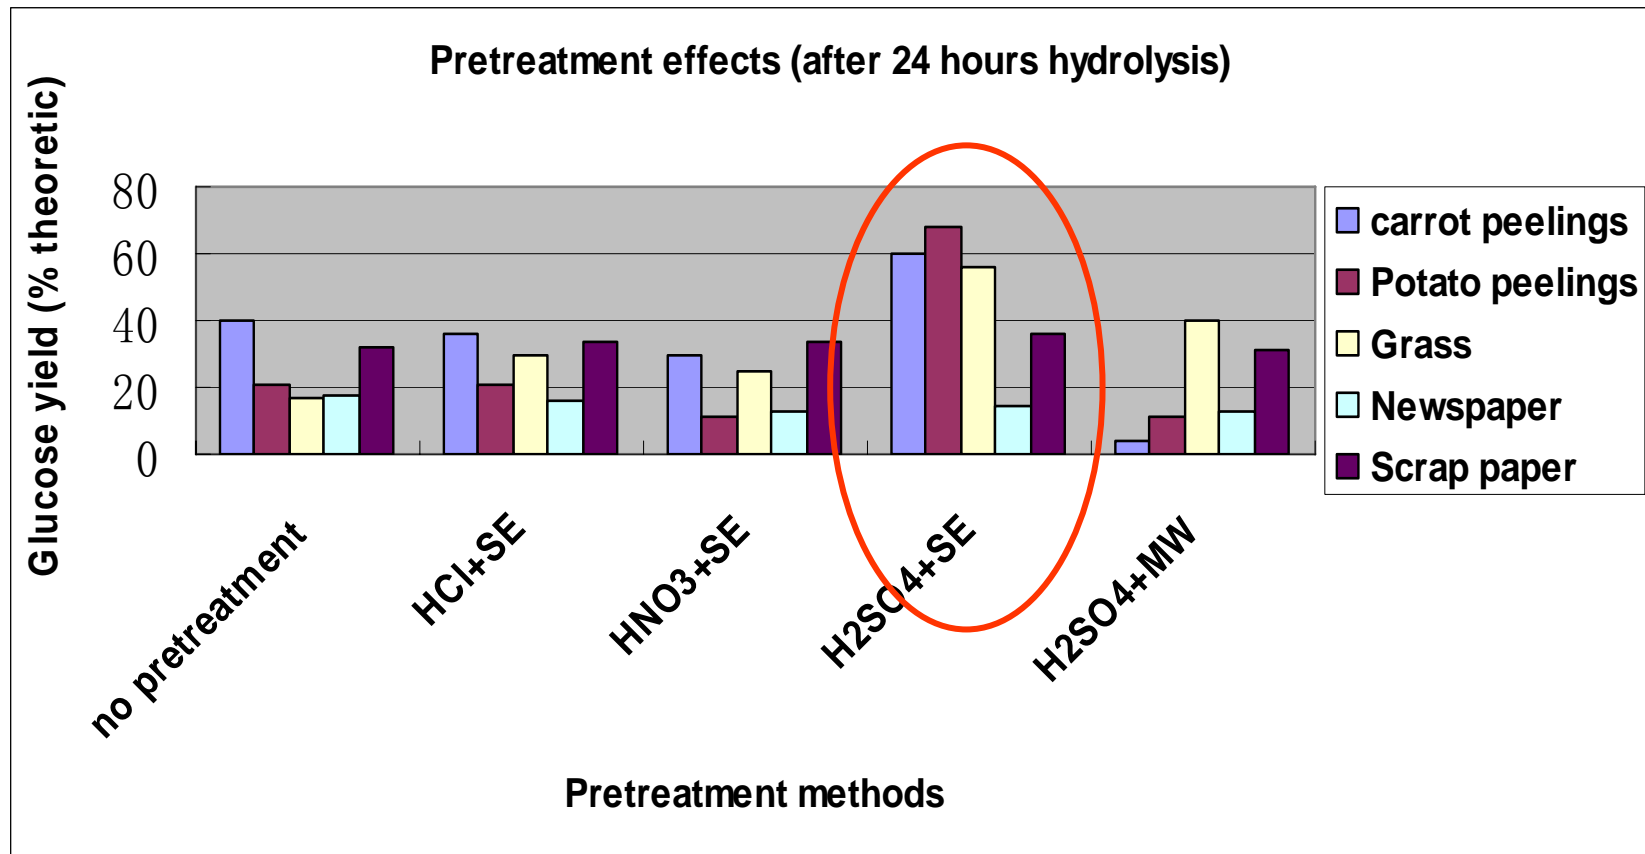


- HCl+SE: Dilute acid (Hydrochloric acid) hydrolysis + Steam Explosion
- HNO<sub>3</sub>+SE: Dilute acid (Nitric acid) hydrolysis + Steam Explosion
- H<sub>2</sub>SO<sub>4</sub>+SE: Dilute acid (sulphuric acid) hydrolysis + Steam Explosion
- H<sub>2</sub>SO<sub>4</sub>+MW: Dilute acid (sulphuric acid) hydrolysis + Microwave treatment

# Results: cellulase effects (without pretreatment)

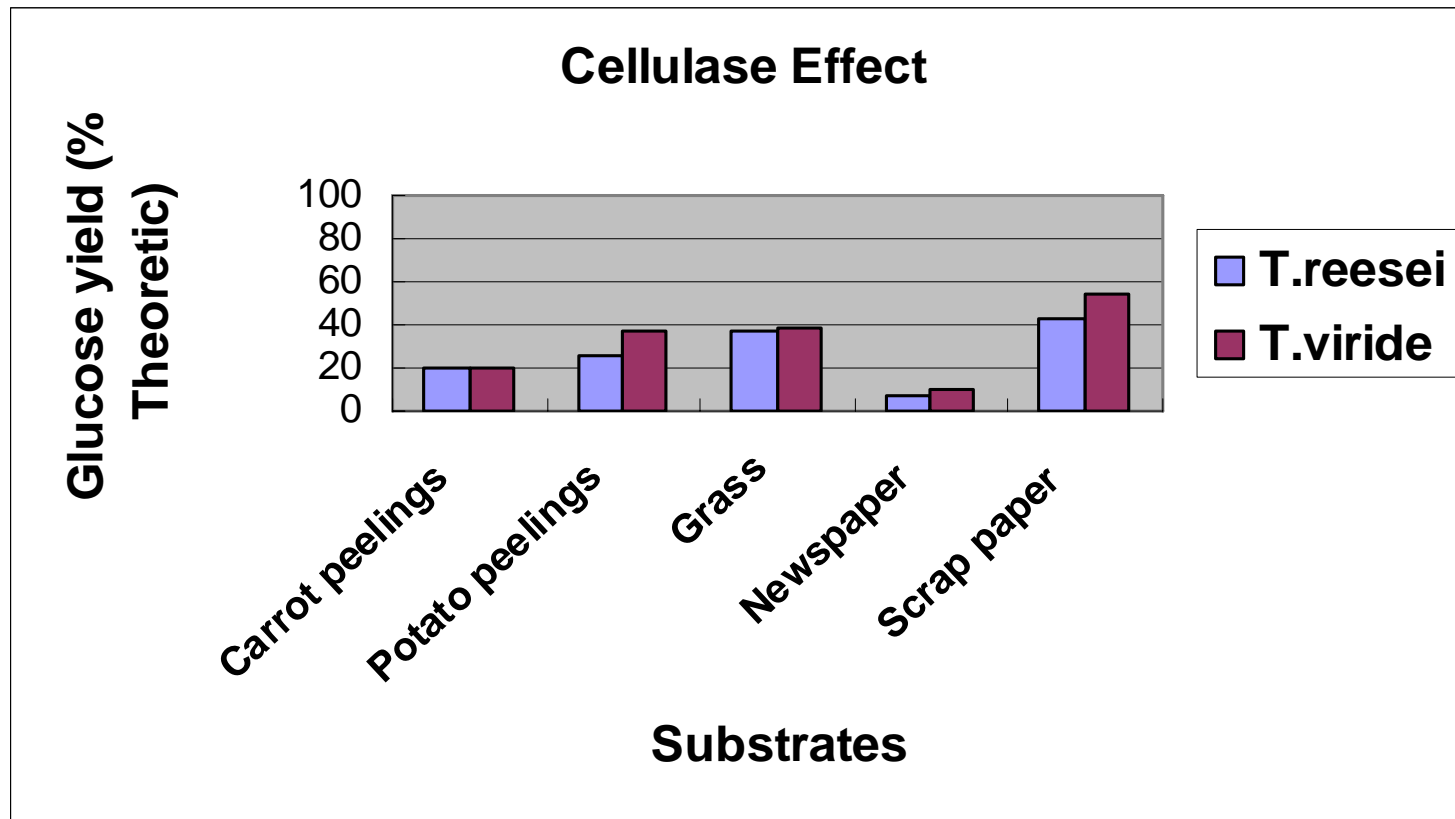

Hydrolysis condition: temperature 50°C, ph 4.8, enzyme loading 60 FPU, time 96 hours


# Current Results: Cellulase effects (with pretreatment)

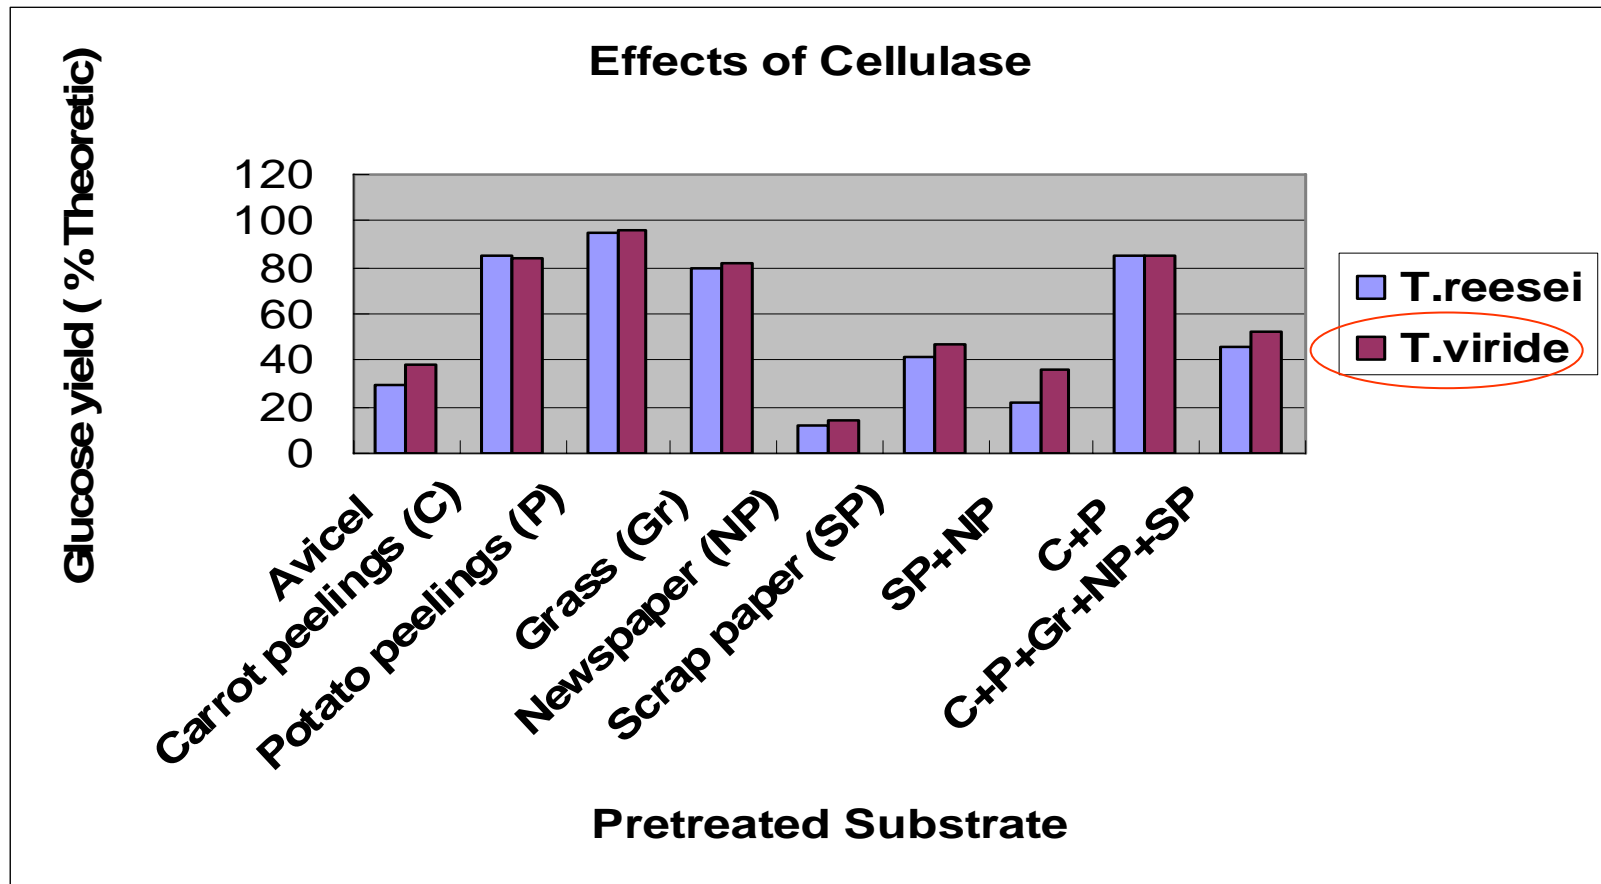

Hydrolysis condition: temperature 50°C, ph 4.8, enzyme loading 60 FPU, time 96 hours

Pretreatment: H<sub>2</sub>SO<sub>4</sub> + SE

# Current results: Glucose yield (after pretreatment)

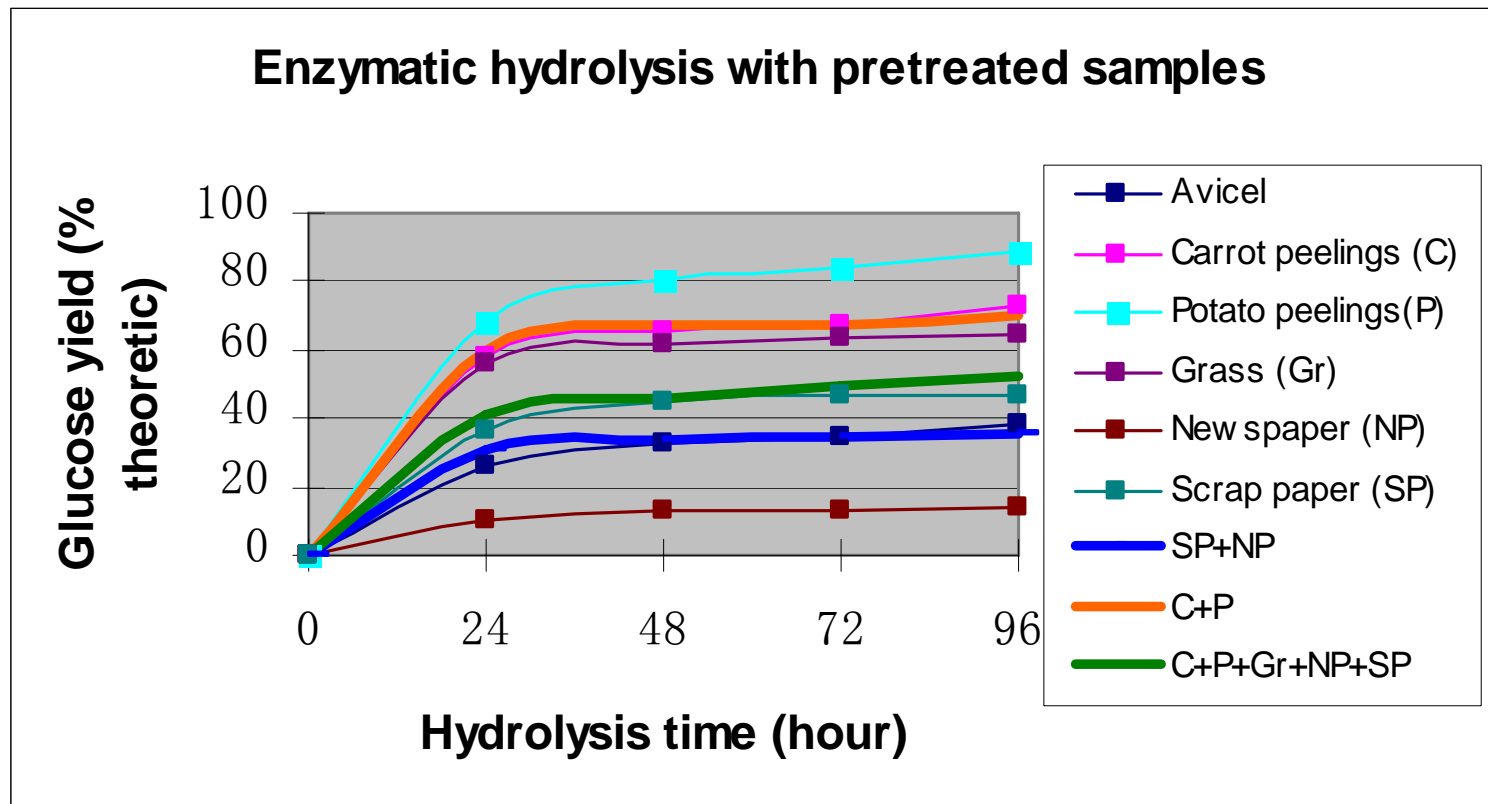

- Hydrolysis condition: temperature 50°C, ph 4.8, enzyme (*T. viride*) loading 40 FPU



# Factorial experiment design

- **Sample:** Carrot peelings
- **Factors:** A, Acid concentration: 1% and 4%  
 B, Temperature 121 and 134 °C  
 C, Enzyme loading: 10 and 60 FPU


Time: 72 hours, pH 4.8  
 Treatment: H<sub>2</sub>SO<sub>4</sub> + SE  
 Enzyme: T. viride  
 Hydrolysis temperature 50°C

## Experimental results

| Run No. | Temperature (°C) | Acid concentration (%) | Enzyme loading (FPU) | Glucose yield (%) |
|---------|------------------|------------------------|----------------------|-------------------|
| 1       | 121              | 4                      | 60                   | 61.16             |
| 2       | 134              | 1                      | 60                   | 72.50             |
| 3       | 134              | 4                      | 60                   | 61.16             |
| 4       | 121              | 1                      | 10                   | 65.21             |
| 5       | 134              | 4                      | 10                   | 50.22             |
| 6       | 134              | 1                      | 10                   | 56.70             |
| 7       | 121              | 4                      | 10                   | 43.34             |
| 8       | 121              | 1                      | 60                   | 68.45             |

## Results from DESIGN-EXPERT Plot

X = A: Acid concentration  
 Y = B: Temperature  
 Z = C: Enzyme loading

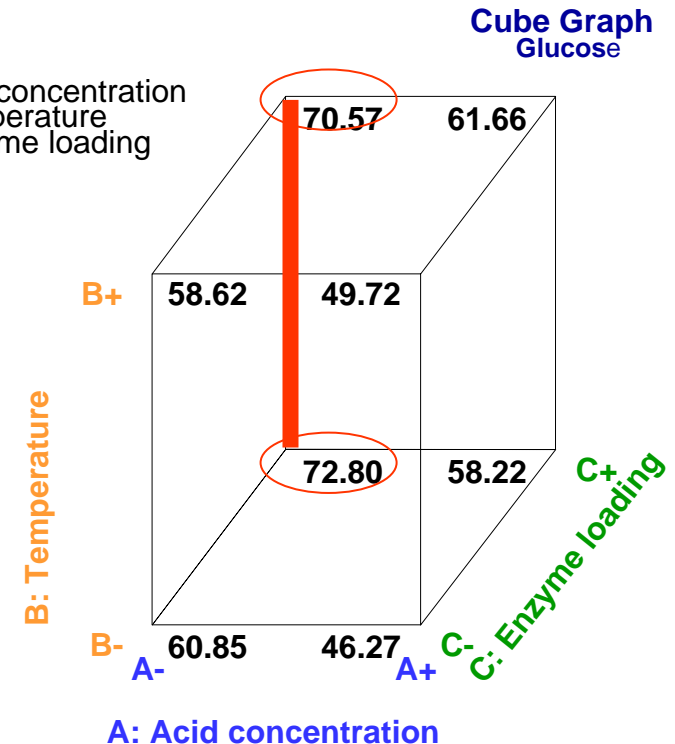


# Factorial experiment design

- **Sample:** Carrot peelings
- **Factors:** A, Acid concentration: 1% and 4%  
 B, Temperature 121 and 134 °C  
 C, Enzyme loading: 10 and 60 FPU

Time: 72 hours, pH 4.8  
 Treatment: H<sub>2</sub>SO<sub>4</sub> + SE  
 Enzyme: T. viride  
 Hydrolysis temperature 50°C

## Comparison of Actual Value (AV) and Predicted Value (PV)

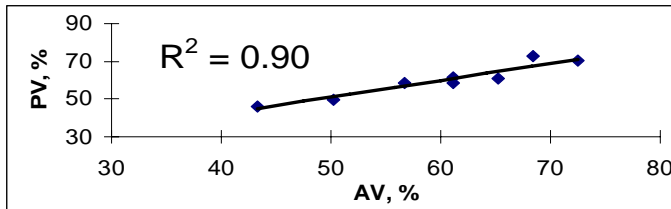


## Table of factor effects

| Factor                              | Effect | % Contribution |
|-------------------------------------|--------|----------------|
| A (Acid concentration)              | 13.12  | 47.70          |
| B (Temperature)                     | 0.04   | 0.13           |
| C (Enzyme loading)                  | 13.58  | 49.39          |
| AB (Acid concentration*Temperature) | 0.76   | 2.78           |

## Results from DESIGN-EXPERT Plot

X = A: Acid concentration  
 Y = B: Temperature  
 Z = C: Enzyme loading

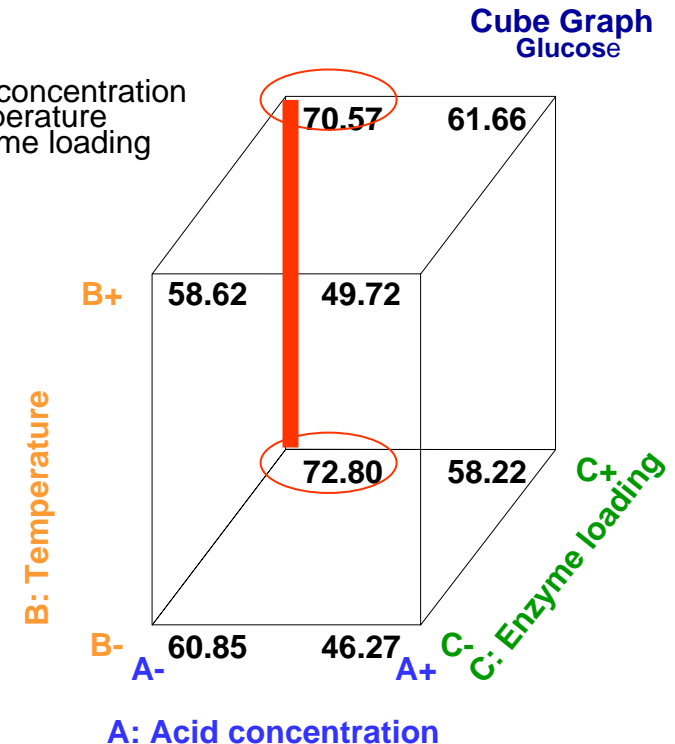

- low setting  
 + high setting

# Conclusions

- Pretreatment of **dilute sulphuric acid hydrolysis** followed with **steam explosion** did increase in general the rate at which the **maximum yield of glucose** was formed. However, this pretreatment did not give higher yields for newspaper wastes.
- Enzyme of **T.viride** is more **effective** on the selected wastes in general as well as the **multi-substrates** by combining the single substrates.
- This investigation reported the **glucose yields** produced by multi-substrates are higher than the average yield by single substrate.
- This study proved the possibility of using multi-substrates as ethanol feedstock and encouraged the **conversion of MSW to ethanol**.
- The **factorial experiment** results showed that **acid concentration** and **enzyme loading** have a **higher effect on glucose yield** within the temperature range of 121-134 °C.

## Future work

- Greater biomass yield
- Other sugar analysis: including xylose, mannose, galactose, and arabinose
- Feedstock from pretreated waste (directly from bin, or separated)
- Ethanol production from fermentable sugars

# Acknowledgement

**Engineering Conference International (ECI) Organization**

**Graduate School, University College London, UK**

**Department of Civil and Environmental Engineering, University  
College London, UK**

**Dorothy Hodgkin's, RCUK**

**Natural and Environmental Research Council (NERC), RCUK**