

6-20-2016

Performance and emissions of a diesel engine fueled with biodiesel doped with a renewable antioxidant additive

Alberto Gonzalo

Universidad de Zaragoza, Spain, agonca@unizar.es

Jorge Arroyo

Universidad de Zaragoza, Spain

Francisco Moreno

Universidad de Zaragoza, Spain

Mariano Muñoz

Universidad de Zaragoza, Spain

Carlos Monné

Universidad de Zaragoza, Spain

See next page for additional authors

Follow this and additional works at: <http://dc.engconfintl.org/gpe2016>

 Part of the [Chemical Engineering Commons](#)

Recommended Citation

Alberto Gonzalo, Jorge Arroyo, Francisco Moreno, Mariano Muñoz, Carlos Monné, Ana Bautista, Noemí Gil-Lalaguna, Cristina Dueso, and José Luis Sánchez, "Performance and emissions of a diesel engine fueled with biodiesel doped with a renewable antioxidant additive" in "5th International Congress on Green Process Engineering (GPE 2016)", Franco Berruti, Western University, Canada Cedric Briens, Western University, Canada Eds, ECI Symposium Series, (2016). <http://dc.engconfintl.org/gpe2016/17>

This Abstract and Presentation is brought to you for free and open access by the Proceedings at ECI Digital Archives. It has been accepted for inclusion in 5th International Congress on Green Process Engineering (GPE 2016) by an authorized administrator of ECI Digital Archives. For more information, please contact franco@bepress.com.

Authors

Alberto Gonzalo, Jorge Arroyo, Francisco Moreno, Mariano Muñoz, Carlos Monné, Ana Bautista, Noemí Gil-Lalaguna, Cristina Dueso, and José Luis Sánchez

PERFORMANCE AND EMISSIONS OF A DIESEL ENGINE FUELED WITH BIODIESEL DOPED WITH A RENEWABLE ANTIOXIDANT ADDITIVE

J. Arroyo^a, F. Moreno^{a,c}, M. Muñoz^{a,c}, C. Monne^{a,c}, A. Bautista^b, N. Gil-Lalaguna^{b,c}, C. Dueso^{b,c}, A. Gonzalo^{b,c,*}, J.L. Sánchez^{b,c}

^a Department of Mechanical Engineering, Universidad de Zaragoza, Spain

^b Chemical and Environmental Engineering Department, Universidad de Zaragoza, Spain

^c Thermochemical Processes Group (GPT), Aragón Institute for Engineering Research (I3A), Universidad de Zaragoza, Zaragoza, Spain

*Corresponding author Tel: +34976762991; e-mail: agonca@unizar.es



June 19-24, 2016

Fairmont Tremblant Hotel, Mont Tremblant, Quebec, Canada

Aim of the work

BIODIESEL

- ✓ Renewable alternative to fossil diesel.
- ✓ Less harmful emissions.
- ✓ Carbon neutral.




**European FAME
Standard EN 14214:**
Quality requirements for
biodiesel commercialization



Properties
FAME Content
Oxidation stability
Viscosity at 40 °C
Water content
CFPP

**World production of biodiesel
(million tons)**

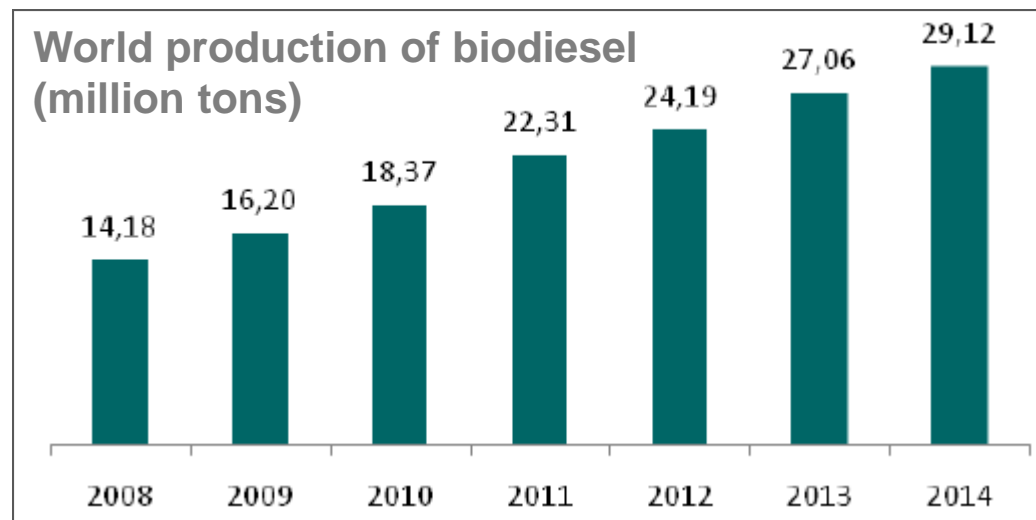

Source: Oil World Statistic Update

Aim of the work

BIODIESEL

- ✓ Renewable alternative to fossil diesel.
- ✓ Less harmful emissions.
- ✓ Carbon neutral.

**European FAME
Standard EN 14214:**
Quality requirements for
biodiesel commercialization




Properties
FAME Content
Oxidation stability
Viscosity at 40 °C
Water content
CFPP




Aim of the work

Synthetic antioxidants

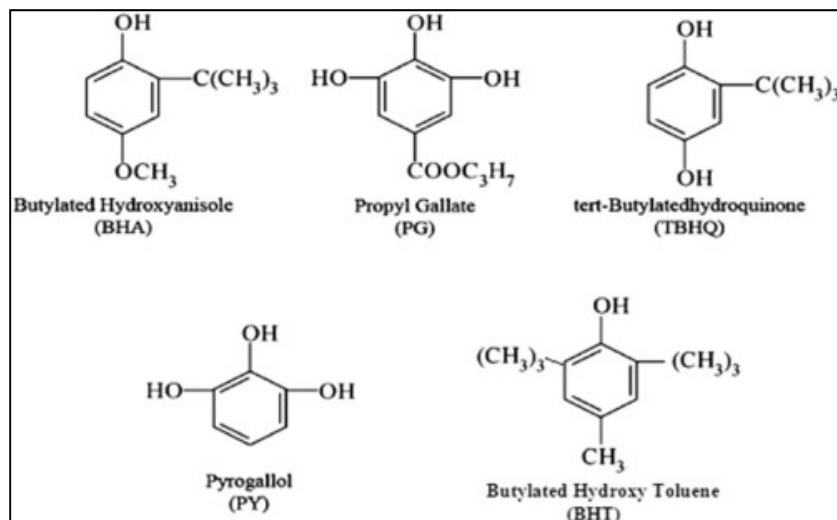

Natural antioxidants

LIGNIN

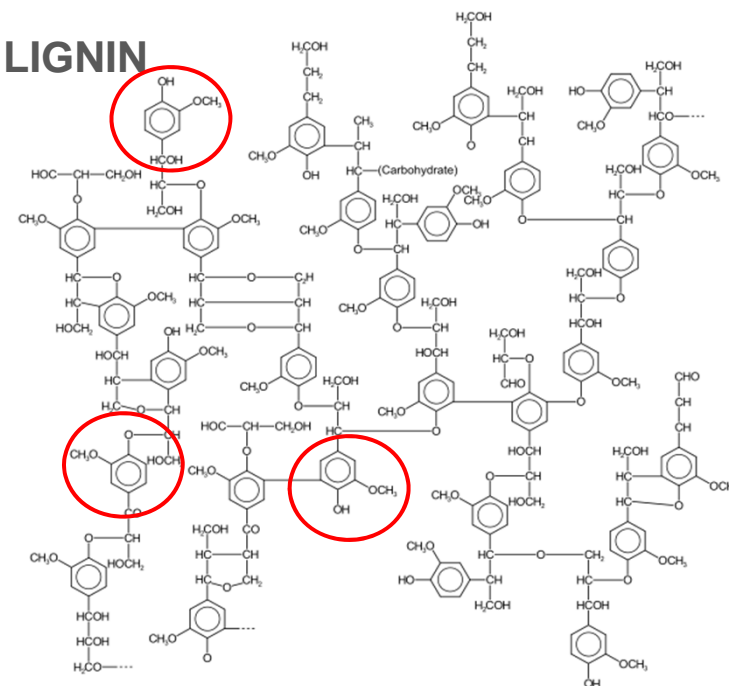


In previous works, lignin derivatives, such as bio-oils from biomass or residues, have demonstrated to be a source of phenols (antioxidants) increasing the oxidation stability till 500%.

Aim of the work

- To test bio oil additivated biodiesel in a diesel engine and compare performance and emissions with those of neat biodiesel and commercial diesel.

FUELS TO ENGINE TESTS

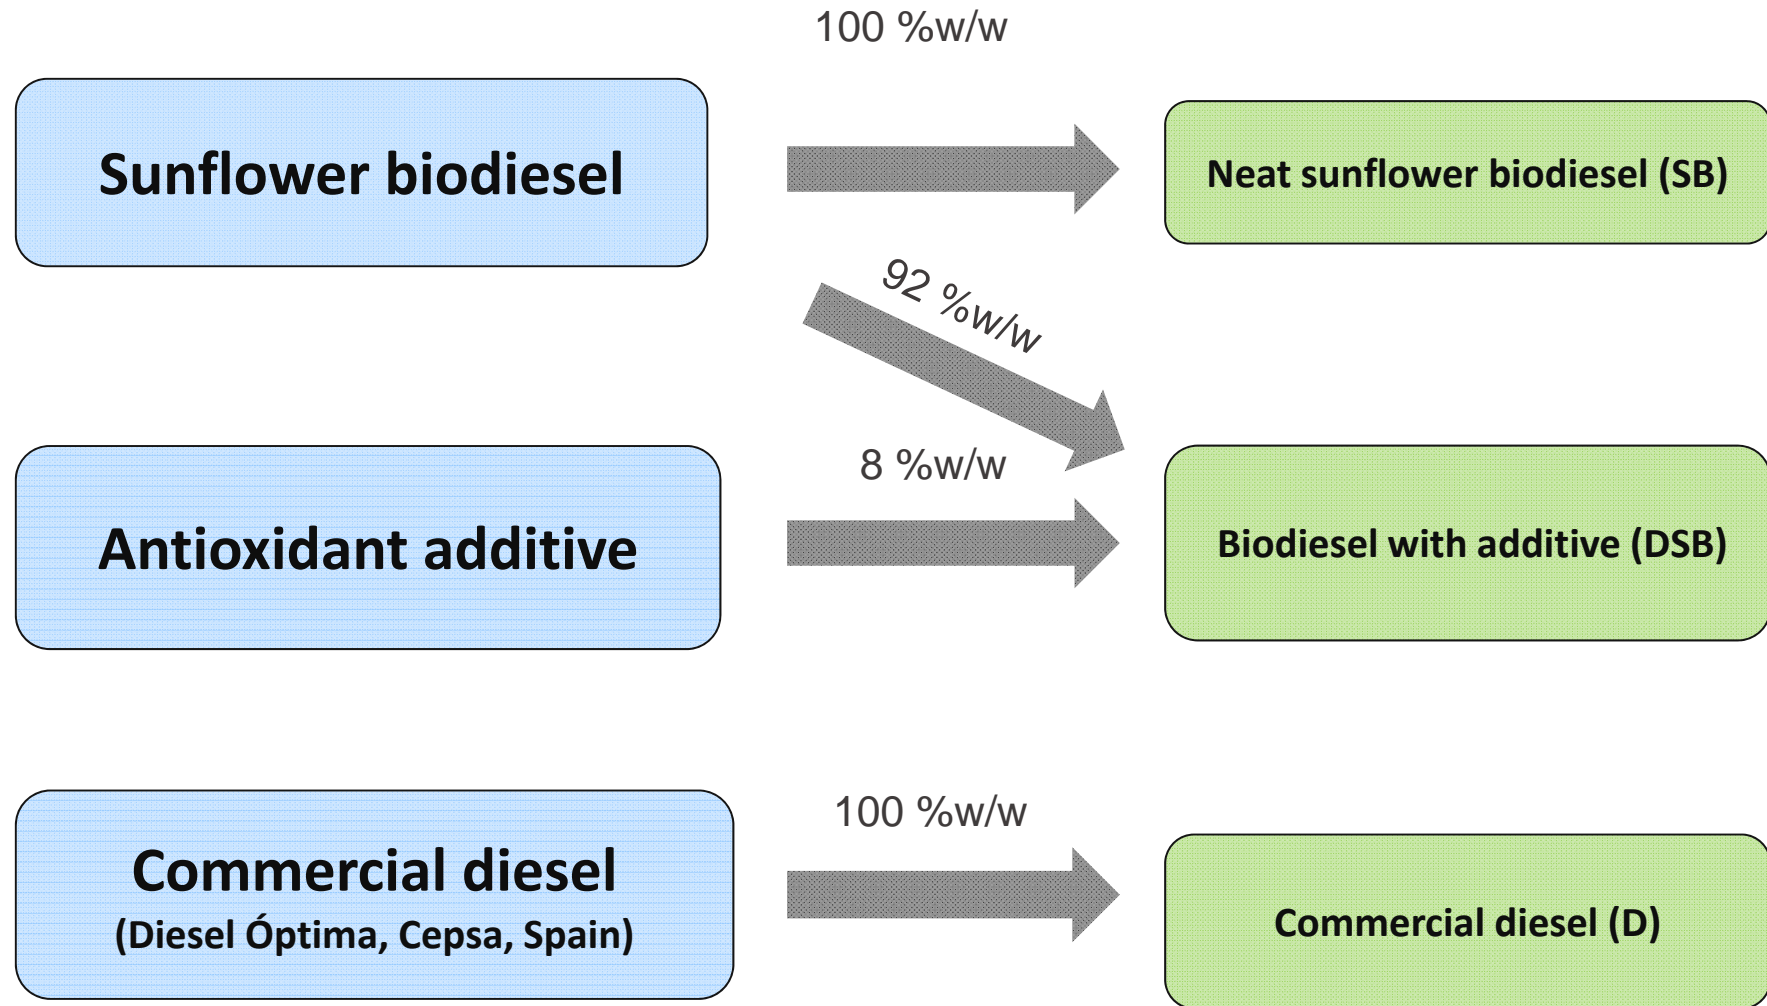

Experimental

BIODIESEL PREPARATION

- Raw materials: Sunflower oil, MeOH, KOH (catalyst)




Oil / alcohol = 1:6 molar ratio.

Catalyst weight = 1 wt.% of oil mass.

- Biodiesel upgrading:

- ✓ excess methanol removal
- ✓ acid washing
- ✓ residual moisture removal

- Reaction conditions: 60 °C, 3h, stirring.

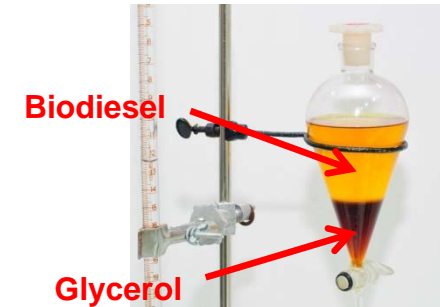


- Composition: Predominance of methyl linoleate (C18:2) followed by methyl oleate (C18:1).

Experimental

ADDITIVE PREPARATION

Bio-oil / biodiesel = 1:1
mass proportion

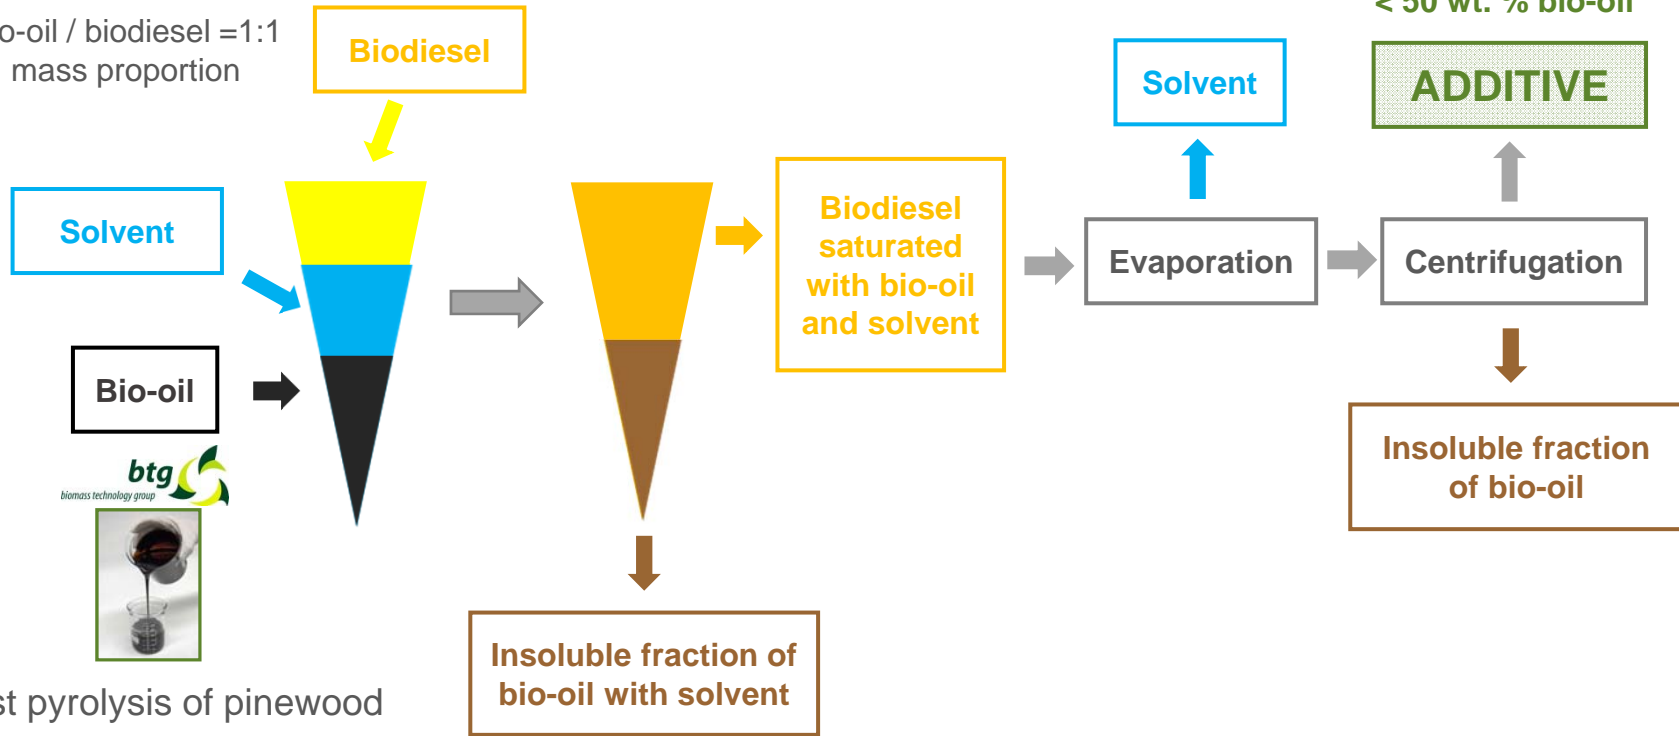

Fast pyrolysis of pinewood

- ✓ As biodiesel in additive is >> 50%
- ✓ Addition of 8 wt. % to biodiesel.

✓ FAME in final biodiesel > 96.5%
(UNE 14214)

Experimental

FUEL PROPERTIES

C, H, N, S

(Leco CHN628 Macro and Leco S628 for Sulphur determination)

**Higher Heating Value
(HHV)**

(C2000 IKA bomb calorimeter)

Density at 15 °C

(Densito 30 PX Mettler Toledo)


**Cold Filter Plugging Point
(CFPP) (ISL FPP 5GS)**

Viscosity at 40 °C

(Cannon Instrument Co., model 150 T845)

Oxidation Stability (Oxy)
(PetroOXY, ASTM D2274)

Engine

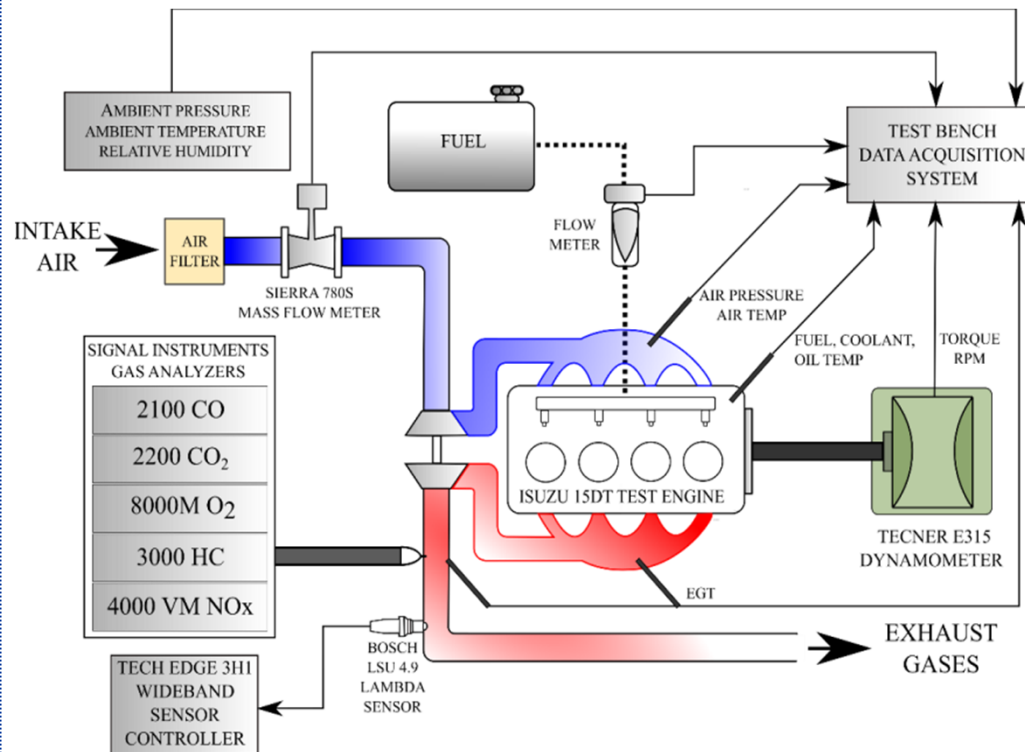

Engine	Isuzu T4EC1 15DT turbocharged
Original Fuel	Diesel
Number of Cylinders	4 in line
Displaced Volume	1487 cm ³
Bore x Stroke	76 x 82 mm
Compression ratio	22:1
Valve timing	12-48-50-10
Fuel delivery system	Mechanical indirect fuel injection

Engine Tests

- Several tests running the engine from 1500 to 4000 rpm at full load were performed to compare the behavior of the different biofuels.
- Exhaust emission characteristics in a European Stationary Cycle (ESC) with 13 phases (European Directive 2005/55/CE)



Phase	Load (%)	Engine speed (rpm)	Weight factor
1	0	1020	0,15
2	100	2500	0,08
3	50	3250	0,10
4	75	3250	0,10
5	50	2500	0,05
6	75	2500	0,05
7	25	2500	0,05
8	100	3250	0,09
9	25	3250	0,10
10	100	4000	0,08
11	25	4000	0,05
12	75	4000	0,05
13	50	4000	0,05





Results

Fuel properties

Fuel	Molar ratio				Density (kg/m ³)	Viscosity (cst)	Water content (ppm)	HHV (kJ/kg)	OXY (min)	CFPP (°C)
	H/C	S/C	N/C	O/C						
D	1.82	0.0001	0.0018	0	840	2.80	75	45620	94.2	-16.1
SB	1.84	0.0001	0.0018	0.09	883	4.47	579	39830	13.8	-5.1
DSB	1.85	0.0001	0.0018	0.09	886	4.30	587	39630	37.6	-2.9

Results

Full load tests

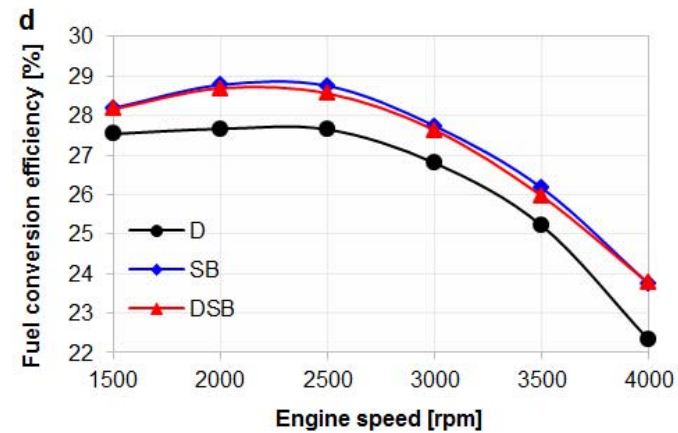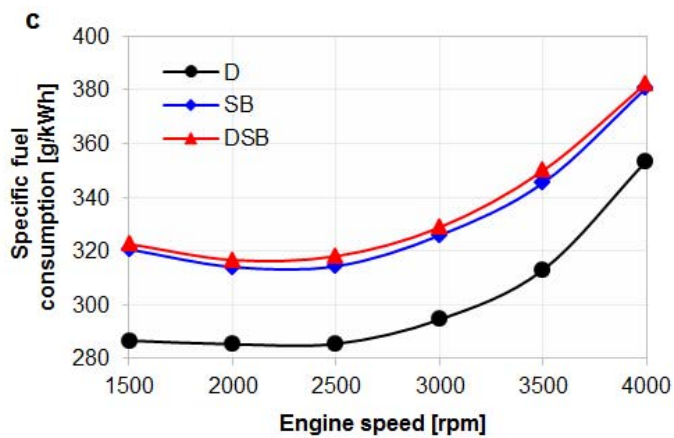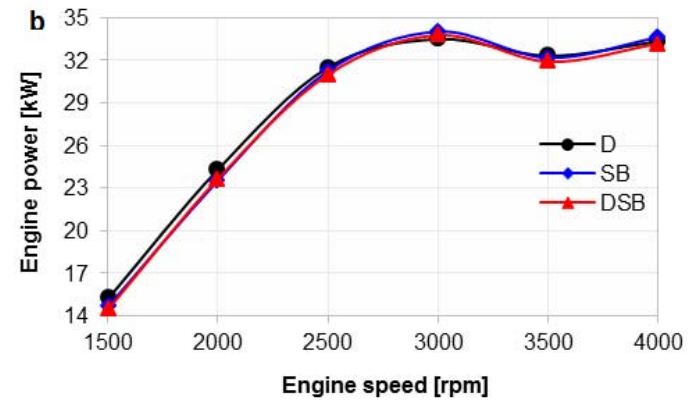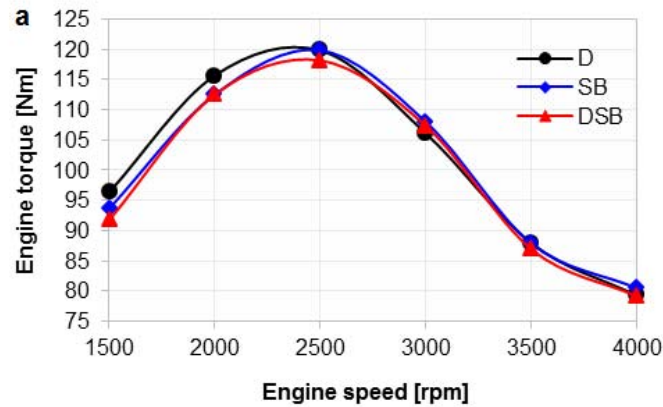

Results

ESC Cycle

Fuel	Specific emissions (g/kWh)				Opacity (mg/m ³)
	NO _x	HC	CO	CO ₂	
D	2.62	0.64	4.16	1186.6	4.94
SB	2.96	0.35	2.92	1207.3	1.59
DSB	2.87	0.40	2.94	1221.6	1.52

CONCLUSIONS

- Biodiesel doped with the antioxidant produced from bio-oil increased noticeably its oxidation stability, while CFPP slightly increased.
- Other properties, such as density or viscosity, were not affected.
- At full load operation of the engine, torque and power were very similar for the three fuels, but efficiency of the two biodiesels were higher than fossil diesel. In general, performances of neat biodiesel and doped biodiesel in the diesel engine were very similar.
- The presence of additive from bio-oil in the biodiesel doesn't significantly change the engine emissions.
- The emissions of the three fuels showed the expected result: lower unburned hydrocarbons, CO and opacity for biodiesels.

The authors express their gratitude to Aragón Government and European Social Fund (GPT group) and to the Ministerio de Economía y Competitividad (MINECO) and FEDER (project ENE2013-41523-R: APROVECHAMIENTO DE COMPUESTOS DE BASE LIGNÍNICA COMO ADITIVOS DE BIOCOMBUSTIBLES) for financial support



PERFORMANCE AND EMISSIONS OF A DIESEL ENGINE FUELED WITH BIODIESEL DOPED WITH A RENEWABLE ANTIOXIDANT ADDITIVE

J. Arroyo^a, F. Moreno^{a,c}, M. Muñoz^{a,c}, C. Monne^{a,c}, A. Bautista^b, N. Gil-Lalaguna^{b,c}, C. Dueso^{b,c}, A. Gonzalo^{b,c,*}, J.L. Sánchez^{b,c}

^a Department of Mechanical Engineering, Universidad de Zaragoza, Spain

^b Chemical and Environmental Engineering Department, Universidad de Zaragoza, Spain

^c Thermochemical Processes Group (GPT), Aragón Institute for Engineering Research (I3A), Universidad de Zaragoza, Zaragoza, Spain

*Corresponding author Tel: +34976762991; e-mail: agonca@unizar.es



June 19-24, 2016

Fairmont Tremblant Hotel, Mont Tremblant, Quebec, Canada