

Spring 5-2-2011

High-Flux Triple Bed Circulating Fluidized Bed (TBCFB) Gasifier for Exergy Recuperative IGCC/ IGFC

Chihiro Fushimi

Tokyo University, fushimi@iis.u-tokyo.ac.jp

Guoqing Guan

Tokyo University

Masanori Ishizuka

Tokyo University

Yu Nakamura

Tokyo University

Atsushi Tsutsumi

Tokyo University

See next page for additional authors

Follow this and additional works at: <http://dc.engconfintl.org/cfb10>

 Part of the [Chemical Engineering Commons](http://dc.engconfintl.org/cfb10/15)

Recommended Citation

Chihiro Fushimi, Guoqing Guan, Masanori Ishizuka, Yu Nakamura, Atsushi Tsutsumi, Yoshizo Suzuki, Eldin Wee, Yong Cheng, and Chi-Hwa wang, "High-Flux Triple Bed Circulating Fluidized Bed (TBCFB) Gasifier for Exergy Recuperative IGCC/IGFC" in "10th International Conference on Circulating Fluidized Beds and Fluidization Technology - CFB-10", T. Knowlton, PSRI Eds, ECI Symposium Series, (2013). <http://dc.engconfintl.org/cfb10/15>

This Conference Proceeding is brought to you for free and open access by the Refereed Proceedings at ECI Digital Archives. It has been accepted for inclusion in 10th International Conference on Circulating Fluidized Beds and Fluidization Technology - CFB-10 by an authorized administrator of ECI Digital Archives. For more information, please contact franco@bepress.com.

Authors

Chihiro Fushimi, Guoqing Guan, Masanori Ishizuka, Yu Nakamura, Atsushi Tsutsumi, Yoshizo Suzuki, Eldin Wee, Yong Cheng, and Chi-Hwa wang

HIGH-FLUX TRIPLE BED CIRCULATING FLUIDIZED BED (TBCFB) GASIFIER FOR EXERGY RECUPERATIVE IGCC/IGFC

Chihiro Fushimi^{1*}, Guoqing Guan^{1,2}, Masanori Ishizuka¹, Yu Nakamura¹,
Atsushi Tsutsumi¹, Yoshizo Suzuki³, Eldin Wee Chuan Lim⁴, Yongpan Cheng⁴,
Chi-Hwa Wang⁴

¹Collaborative Research Center for Energy Engineering, Institute of Industrial Science, The University of Tokyo, 4-6-1 Komaba, Meguro, Tokyo, 153-8505, Japan

²NJRISE, Hirosaki University, Japan

³Clean Gas Group, National Institute of Advanced Industrial Science and Technology, 16-1 Onogawa, Tsukuba, Ibaraki 305-8569, Japan

⁴Department of Chemical and Biomolecular Engineering, National University of Singapore, 4 Engineering Drive 4, Singapore 117576

* fushimi@iis.u-tokyo.ac.jp, Tel: +81-3-5452-6293 Fax: +81-3-5452-6728

Abstract

The flow behavior of silica sand, of average particle size 128 μm , was investigated using a large-scale triple-bed combined circulating fluidized bed (TBCFB) cold model, which was composed of a 0.1 m I.D. \times 16.6 m tall riser, a solids distributor, a 0.1 m I.D. \times 6.5 m long downer, a gas-solids separator, a 0.75 m \times 0.27 m \times 3.4 m bubbling fluidized bed and a 0.158 m I.D. \times 5.0 m tall gas-sealing bed (GSB) with a high solids mass flux. The main focus of this study is to determine effect of riser secondary air injection on solids mass flux (G_s) and solid holdup. G_s slightly increased by secondary air injection when the riser gas velocity (U_{gr}) was less than 10 m/s. This was caused by the increase in the pressure difference between the GSB and the riser. Secondary air injection had little influence on the solid holdup in the riser. The mixing between silica sand and coal particles was investigated for two different coal feeding arrangements by coupling Computational Fluid Dynamics (CFD) with the Discrete Element Method (DEM). The results show a tangential arrangement provided better mixing than a normal arrangement except near the entrance.

INTRODUCTION

Coal utilization is one of the major contributors of anthropogenic CO₂ and pollutants emission. Clean Coal Technology (CCT) has been under development to find ways

for more efficient utilization of coal. So far, Integrated coal Gasification Combined Cycle (IGCC) and Integrated coal Gasification Fuel-cell Combined cycle (IGFC) have been developed to increase the thermal efficiency of coal-fired power plants.

For improvement of the thermal efficiency of coal-fired IGCC/IGFC, an advanced IGCC (A-IGCC) or advanced IGFC (A-IGFC) system with exergy recuperation was proposed (1,2). In this system, the waste heat from a gas turbine or solid oxide fuel cell is recuperated as a heat source for steam gasification of coal to reduce the partial combustion of coal. Because the reaction temperature for gasification is expected to be 700-900 °C, which is not suitable for conventional entrained bed gasifiers, a novel triple-bed combined circulating fluidized bed (TBCFB) gasifier was proposed (3-5). The TBCFB is composed of a downer pyrolyzer, a bubbling fluidized bed (BFB) char gasifier, and a riser partial combustor of unreacted char. The heat generated in the riser partial combustor is supplied to the downer pyrolyzer for the endothermic reaction by using a heat media such as silica sand (3-5). According to the mass and energy balance calculation for the system (2,6), the solids mass flux (G_s) of the heat media should be 511 to 684 kg/(m²•s), which is much higher than in a conventional CFB (7-10) to make the A-IGCC/IGFC system feasible.

Besides the requirement for a high solids flux of the heat media, the mixing behavior between the heat media and reactant, i.e. silica sand and coal, is also critical. Since the residence time of the solid particles in the downer is usually quite short, the heat carried by the silica sand needs to be effectively transferred to the coal for pyrolysis. In this study, a preliminary investigation was carried out to study the mixing behavior between sand and coal particles by numerical simulation.

In our previous study (5), we set up a large-scale TBCFB gasifier cold model and investigated flow behavior of the sand particles. The maximum obtained G_s was over 400 kg/(m²•s) when the riser gas velocity (U_{gr}) was 12 m/s, and the average solid holdup in the bottom dense region of 0.110 to 0.122 at $G_s=377$ to 410 kg/(m²•s) was achieved by installing a gas-sealing bed (GSB) between the riser and BFB. However, it was observed that some amount of air passed from the riser bottom to the GSB bottom when the riser gas velocity was high. Thus, in this study, some amount of riser gas was injected in the second nozzle 1.9 m above the riser bottom and the influence of the secondary air on G_s and solids holdup was investigated.

pressures were measured at 47 pressure taps around the unit using differential pressure sensors (Keyence Corp., AP48). The output signals from the sensors were acquired at a sampling frequency of 100 Hz via a data logger (CONTEC, AIO-163202FX) and a laptop computer. Solids mass flux (G_s) was measured by closing a butterfly valve below the cyclone 1 and measuring the time to accumulate given amounts of particles. This was determined from the mean value after 10 measurements at a steady state.

Simulation

The commercially available CFD code FLUENT (Ansys, Inc) and a Discrete Element Method (DEM) based code EDEM (DEM-Solutions Ltd) were used to study the dynamics of coal and sand particles in the downer. The air flow was solved by FLUENT using an Eulerian approach, and particle motion was computed by EDEM using a Lagrangian approach. At every time step the two methods were coupled such that interactions between gas and solid particles were handled rigorously. Due to CPU and memory limitations, simulations were carried out for sand particles 4 mm in diameter and coal particles 6 mm in diameter in a downer of 2 m in length. The other geometrical dimensions were the same as those in the experimental setup.

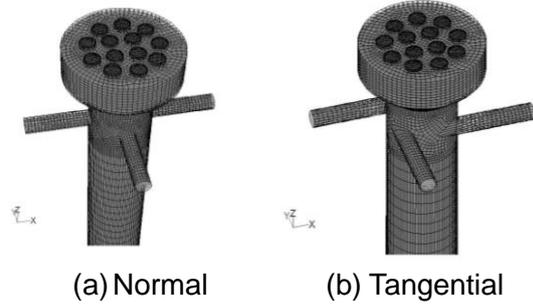


Figure 2 Arrangements of 4 nozzles for coal feeding

The basic equations for air flow in the downer are the continuity and momentum equations (11)

$$\frac{\partial(\varepsilon\rho)}{\partial t} + \nabla \cdot (\rho\varepsilon\vec{u}) = 0 \quad (1)$$

$$\frac{\partial(\varepsilon\rho\vec{u})}{\partial t} + \nabla \cdot (\rho\varepsilon\vec{u}\vec{u}) = -\nabla p + \mu\varepsilon\nabla^2\vec{u} + \rho\varepsilon\vec{g} - \vec{S} \quad (2)$$

where ε is the air volume fraction, \vec{g} is the gravity force vector, \vec{S} is the momentum sink and the coupling between the gas and solid phases is achieved through the calculation of the momentum sink of the drag force that arises due to the slip velocity between the phases. The momentum sink \vec{S} is calculated by: $\vec{S} = \frac{\sum \vec{F}_D}{V}$, where

V is the volume of a CFD mesh cell, and \vec{F}_D is the summation of the drag force exerted on the fluid in the mesh cell. The free stream drag model adopted was

$$\vec{F}_D = 0.5C_D\rho A|\vec{v}|\vec{v} \quad (3)$$

where the drag coefficient C_D depends on the Reynolds number (11)

$$\text{Re}_p = \frac{\varepsilon\rho d_p v_r}{\mu} \quad (4)$$

$$C_D = \begin{cases} \frac{24}{\text{Re}_p} & \text{Re}_p \leq 0.5 \\ 24(1.0 + 0.15\text{Re}_p^{0.687})/\text{Re}_p & 0.5 < \text{Re}_p \leq 1000 \\ 0.44 & \text{Re}_p > 1000 \end{cases} \quad (5)$$

The sand particles were fed into the downer through 13 tubes in the distributor, and two nozzle arrangements were designed to feed coal into the downer, as shown in Fig.2. The four feeding nozzles were all horizontal. One arrangement was that all the four nozzles were normal to the downer, and the other arrangement was that all four nozzles were tangential to the downer. The uniform inlet velocity for the nozzle was 20 m/s, the standard $k \sim \varepsilon$ turbulent model was adopted.

RESULTS AND DISCUSSION

Effect of secondary air injection on G_s

Figures 3 and 4 show the solids mass flux (G_s) and the pressure difference between the GSB and riser bottom as a function of riser gas velocity (U_{gr}), respectively. Note that U_{gr} was defined as the sum of air fed from the riser bottom and the secondary injection nozzle divided by the cross section of the riser. When no secondary air was injected, G_s monotonically increased with the increase in U_{gr} . The maximum G_s obtained was 433 kg/(m²•s) at U_{gr} =12 m/s. When secondary air was injected, G_s peaked at 451 kg/(m²•s) at U_{gr} =10 m/s (i.e. 6 m/s was fed from the bottom and 4 m/s was fed from the nozzle). Further increases

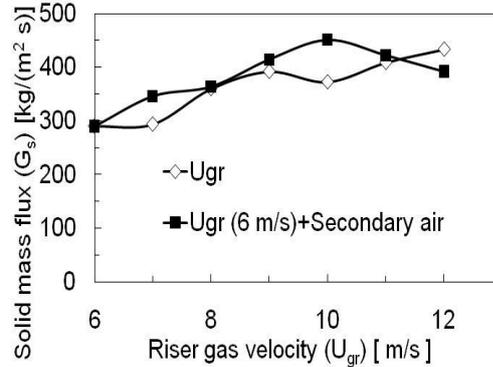


Figure 3 Relationship between riser gas velocity (U_{gr}) and solid mass flux (G_s)

in U_{gr} decreased G_s . Compared with the results without secondary air injection, the G_s was slightly larger at $U_{gr} \leq 10$ m/s. However, the influence of secondary air injection was not significant at velocities $U_{gr} \geq 11$ m/s. It can be seen in Figure 4 the pressure difference between the GSB and riser bottom, which is a major driving force to transport solids to riser, became larger when secondary air injection was used.

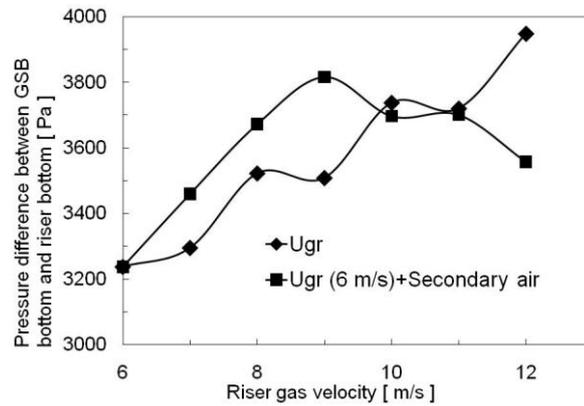


Figure 4 Relationship between riser gas velocity and pressure difference between GSB bottom and riser bottom

Thus, it can be said secondary air injection is an effective way to increase G_s when the total U_{gr} is not high.

Effect of secondary air injection on solids holdup along riser

The influence of secondary air injection on riser solids holdup was also studied. Figure 5 shows the apparent solids holdups (ϵ_s) along riser calculated by the following equation;

$$\Delta P / \Delta H = \rho_p \epsilon_s g \quad (6)$$

where ΔP [Pa], ΔH [m], ρ_p [kg/m³], ϵ_s [-] and g [m/s²] mean pressure difference, the distance between the two sensors, particle density, solids holdup and the gravitational acceleration, respectively. The open and closed symbols represent the results with and without secondary air injection, respectively. ϵ_s decreased sharply at the bottom part of the riser ($H_r < 5$ m) and gradually decreased at the middle and top of the riser ($H_r \geq 5$ m). The solids holdup decreased in the riser as U_{gr} increased. When U_{gr} was 10-12

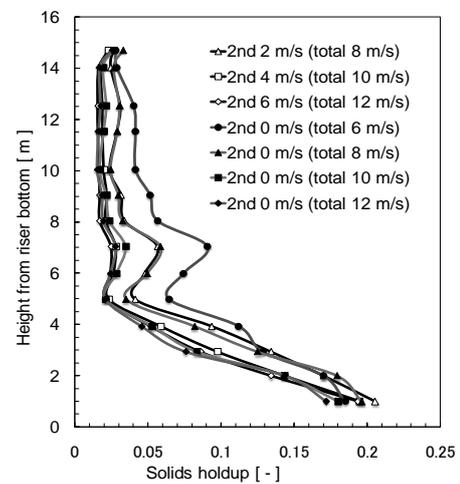



Figure 5 Solids holdup along riser

m/s, the ϵ_s was almost constant (around 0.02) at $H_r \geq 5$ m. The results indicate the formation of dense phase at $H_r < 5$ m and lean phase at $H_r \geq 5$ m. By comparing the results with and without secondary air injection at each U_{gr} , a slight increase in ϵ_s was observed at bottom dense part ($H_r < 5$ m). However, no significant difference of ϵ_s

was observed at middle and top part ($H_r \geq 5$ m). This indicated that secondary air injection did not significantly increase solids holdup along riser.

Simulation results

Figure 6 shows the mixing behavior between sand particles (dark) and coal particles (light). It can be seen that near the entrance, the tangential arrangement resulted in a poorer mixing performance than the normal arrangement. This is

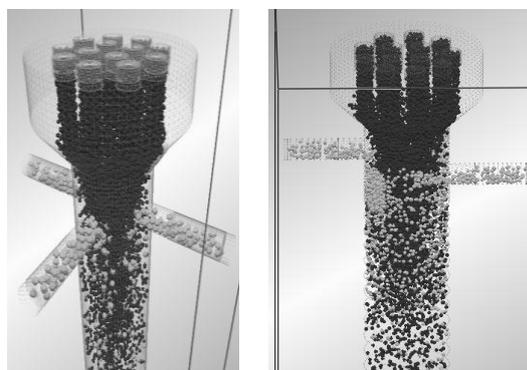

(a) Normal

(b) Tangential

Figure 6 Mixing behaviors for the two types of nozzle arrangements

because in the normal arrangement, strong collisions between the normally injected coal particles and the falling sand particles occurred. In contrast, in the tangential arrangement, the coal particles had a tendency to move spirally along the walls of the downer while most of the sand particles moved downwards along the center of downer. This resulted in less mixing between the coal and sand particles in the latter case. But downstream, the sand and coal particles are distributed more uniformly in the radial direction when the tangential arrangement was used than when the normal arrangement was used, which means the tangential arrangement gave better mixing than the normal arrangement downstream of the feeder.

The mixing of coal and sand particles depends on several parameters, such as particle diameters, inlet velocity, downer diameter and solids mass flux. A sensitivity analysis of these parameters on the mixing is still under study. Also, the mixing content will be quantified and a suitable mixing index will be developed.

CONCLUSIONS

- 1) Secondary air injection slightly increases solid mass flux (G_s) at a riser gas velocity ≤ 9 m/s. This is thought to be due to the increase in the pressure difference between the GSB and the riser bottom, which is the main driving force to transport solids.
- 2) The injection of secondary air does not affect solids holdup along riser.
- 3) The tangential arrangement of nozzles for feeding coal particles into the downer provided better mixing between coal and sand particles except near the entrance.

ACKNOWLEDGEMENT

This study was supported by the New Energy and Industrial Technology Development Organization (NEDO), Japan and the Economic Development Board Singapore under grant number R261-501-003-414 (Minerals, Metals and Materials Technology Center, National University of Singapore)

REFERENCES

- 1) A. Tsutsumi, Advanced IGCC/IGFC using exergy recuperation technology, *Clean Coal Technol. J.* (in Japanese) **11** (2004) 17-22.
- 2) J.-i. Hayashi, S. Hosokai, N. Sonoyama, Gasification of low-rank solid fuels with thermochemical energy recuperation for hydrogen production, *Trans. IChem E: Part B* **84**, (2006) 409-419.
- 3) G. Guan, C. Fushimi, M. Ikeda, Y. Nakamura, A. Tsutsumi, T. Suda, M. Ishizuka, H. Hatano, S. Matsuda, Y. Suzuki, Flow behaviors in a high solid flux circulating fluidized bed composed of a riser, a downer and a bubbling fluidized bed, *Fluidization XIII* 407-414 (2010)
- 4) G. Guan, C. Fushimi, A. Tsutsumi, Prediction of flow behavior of the riser in a novel high solids flux circulating fluidized beds for steam gasification of coal or biomass, *Chem. Eng. J.* **164** (2010) 221-229.
- 5) C. Fushimi, G. Guan, Y. Nakamura, M. Ishizuka, A. Tsutsumi, S. Matsuda, H. Hatano, Y. Suzuki, Hydrodynamic characteristics of a large-scale triple-bed combined circulating fluidized bed, *Powder Technol.* (accepted)
- 6) X.T. Bi, X. Liu, High density and high solids flux CFB risers for steam gasification of solids fuels, *Fuel Process. Technol.* **91** (2010) 915-920.
- 7) X. Liu, X. Cui, G. Sun, F. Sun, T. Suda, G. Xu, High solid-flux concurrent conveying flow-realized by coupling a moving bed to the bottom section of a riser, *Ind. Eng. Chem. Res.* **47** (2008) 9703-9708.
- 8) X. Liu, X. Cui, G. Sun, T. Suda, M. Narukawa, Y. Liu, G. Sun, G. Xu, Buildup of high solids flux conveying flow by coupling a moving bed to the riser bottom, *AIChE J.* **55** (2009) 2477-2481.
- 9) X.-B. Qi, J. Zhu, X. Huang, A new correlation for predicting solids concentration in the fully developed zone of circulating fluidized bed risers, *Powder Technol.* **188** (2008) 64-72.
- 10) X. Wang, B. Jin, W. Zhong, M. Zhang, Y. Huang, F. Duan, Flow behaviors in a high-flux circulating fluidized bed, *Int. J. Chem. React. Eng.* **6** (2008) A79.
- 11) User Guide, EDEM-CFD coupling module for FLUENT, (2010).