

Fall 11-10-2016

Composite metallic nanofoam structures

David Bahr

Purdue University, dfbahr@purdue.edu

Matthew Howard

Purdue University

Mohamad Zbib

Purdue University

Raheleh Rahimi

Purdue University

John Balk

University of Kentucky

Follow this and additional works at: http://dc.engconfintl.org/composites_all



Part of the [Materials Science and Engineering Commons](#)

Recommended Citation

1. N. Abdolrahim, D.F. Bahr, B. Revard, C. Reilly, J. Ye, T.J. Balk, et al., The mechanical response of core-shell structures for nanoporous metallic materials, *Philos. Mag.* 93 (2012) 736–748. 2. I. Mastorakos, H. Zbib, D. Bahr, J. Parsons, M. Faisal, Pseudoelastic behavior of Cu-Ni composite nanowires, *Appl. Phys. Lett.* 94 (2009) 043104. 3. K.A. Smith, M.B. Zbib, D.F. Bahr, M.J.-F. Guinel, Elastic behavior of a core-shell metal-carbon nanotube composite foam, *MRS Commun.* 4 (2014) 77–81.

This Conference Proceeding is brought to you for free and open access by the Proceedings at ECI Digital Archives. It has been accepted for inclusion in Composites at Lake Louise (CALL 2015) by an authorized administrator of ECI Digital Archives. For more information, please contact franco@bepress.com.

COMPOSITE METALLIC NANOFOAM STRUCTURES

David F. Bahr, School of Materials Engineering, Purdue University
dfbahr@purdue.edu

Matthew Howard, School of Materials Engineering, Purdue University

Mohamad B. Zbib, School of Materials Engineering, Purdue University

Raheleh M. Rahimi, School of Materials Engineering, Purdue University

T. John Balk, Chemical Engineering and Materials Science, University of Kentucky

Key Words: Multilayer metallic films, carbon nanotubes

Metallic nanofoams made of metals such as nickel (Ni) or gold (Au) with ligament sizes on the order of 10's to 100's of nm's exhibit several remarkable properties as a consequence of their low relative density and high specific surface area, such as outstanding strength to weight ratios, enhanced plasmonic behavior and size-effect-enhanced catalytic behavior. However, these metallic nanofoams suffer from macroscopically brittle behavior due to plastic deformation in individual ligaments. With little or no barriers for slip, work-hardening is not possible within ligaments and extremely localized plasticity, once initiated, leads to a few ligaments necking and what appears to be macroscopically brittle failure of the structure under load. Many of the nanofoams produced from metals were originally formed via dealloying.

Recently both simulations and experiments have identified that layered ligaments of metallic foams can exhibit significantly improved strength and hardening in Ni-Au core-shell foams[1]. Simulations of Cu-Ni predict that this material combination will exhibit pseudo-elastic behavior and eliminate the macroscopic brittle failure [2]. However, using a metallic foam as a substrate for subsequent layered metallic films limits the amount of metallic layers that can be deposited because the initial foam must have a minimum amount of material (often a solid fraction of approximately 25%). Using a significantly less dense foam as a template should allow for subsequent multilayer growth that would enable larger numbers of layers, and therefore a possible increase in overall strength to total ligament diameter. Single layers have been demonstrated in a prior study [3].

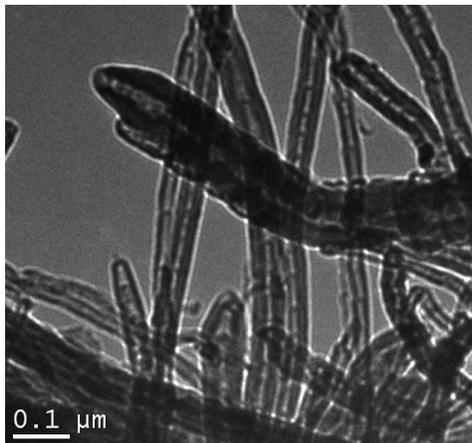


Figure 1 – Cu-Ni layers on CNT foam

Pulse electroplating from a nickel sulfamate electrolyte bath was used to deposit alternating layers of Ni and Cu. The bath consisted of 90 g l⁻¹ Ni, 0.9 g l⁻¹ Cu and 30 g l⁻¹ boric acid (pH 3-3.5). This solution allows for alternating Ni and Cu layers to be alternately plated by varying the applied voltage, the end layer is actually an alloy of mostly Cu with Ni, and then mostly Ni. Low density foams were selected as a template for subsequent deposition. These included 2% volume carbon nanotubes as well as electrospun carbon fibers. Typical structures are shown in Figure 1. The resulting foams were then indented using flat punch nanoindentation and the effective modulus increased by a factor of three and the elastic recovery after indentation increased substantially (to about one half the original impression depth).

The presentation will describe the processing method, the structural changes that occur when the films transition from layer by layer to island growth, and the resulting properties of the foams.

1. N. Abdolrahim, D.F. Bahr, B. Revard, C. Reilly, J. Ye, T.J. Balk, et al., The mechanical response of core-shell structures for nanoporous metallic materials, *Philos. Mag.* 93 (2012) 736–748.
2. I. Mastorakos, H. Zbib, D. Bahr, J. Parsons, M. Faisal, Pseudoelastic behavior of Cu-Ni composite nanowires, *Appl. Phys. Lett.* 94 (2009) 043104.
3. K.A. Smith, M.B. Zbib, D.F. Bahr, M.J.-F. Guinel, Elastic behavior of a core-shell metal-carbon nanotube composite foam, *MRS Commun.* 4 (2014) 77–81.